



Video cable 0.6-3.7 green

RoHS

CROSS SECTION

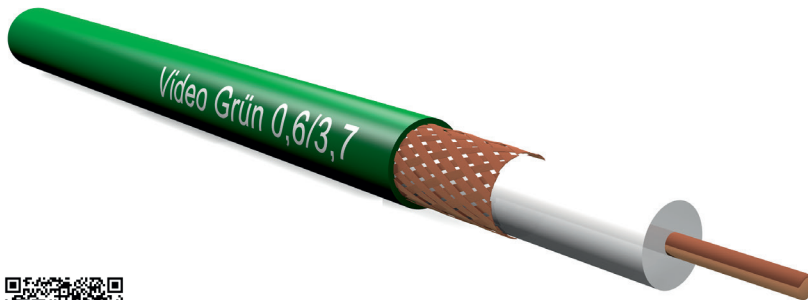

APPLICATION

For the connection of appliances with video transmission.

STRUCTURE

Inner conductor	Ø 0.58 +/- 0.01 mm, bare copper wire
Insulation	Polyethylene, diameter (mm) 3.71 +/- 0.10 mm, colour: natural
Mesh	Copper mesh, bare, coverage 72%
Outer sheath	Made from PVC, diameter 6.10 +/- 0.20 mm, colour: green

SPECIAL FEATURES

Sheath colour
Green

TECHNICAL DATA

Wave resistance	75 +/- 3 Ohm
Direct current resistance (Ohm/km)	Inner conductor < 66.0 Outer conductor < 19.0
Capacity (pF/m)	67 +/- 3
Attenuation (dB/100 m) at	50 MHz: 9.10 100 MHz: 12.40 200 MHz: 17.70 450 MHz: 27.80 860 MHz: 39.40 1000 MHz: 43.20
Return loss attenuation (dB):	5-450 MHz > 20 450-1000 MHz > 18

Product description	Ohm	Outer Ø (mm)	Cu index (mm)	Weight (kg/km)	Product number
Video green 0.6-3.7	75	6.15	24.0	45	10350230