



Video cable 1.0/6.6

RoHS

CROSS SECTION

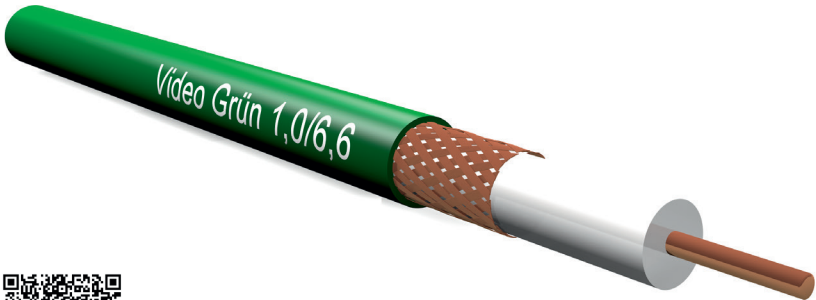

APPLICATION

For the connection of appliances with video transmission.

STRUCTURE

Inner conductor	Ø 1.00 +/- 0.01 mm, bare copper wire
Insulation	Polyethylene
Diameter (mm)	6.38 +/- 0.10 mm 7.00 +/- 0.10 mm 8.80 +/- 0.20 mm
Mesh	Bare copper wire
Outer sheath	Made from PVC, green

SPECIAL FEATURES

Sheath colour
Green or Black

TECHNICAL DATA

Wave resistance	75 +/- 1 Ohm
Attenuation (dB/100 m) at	1 MHz: 0.6db 5 MHz: 1.4 db 10 MHz: 2.0 db
Direct current resistance (Ohm/km)	Inner conductor 24 Ohm/km Outer conductor 7.5 Ohm/km
Operating temperature	-40°C to +70°C (fixed installation)
Bending radius	Min. 45 mm

Product description	Ohm	Outer Ø (mm)	Cu index (mm)	Weight (kg/km)	Product number
Video cable green 1.0/6.6	75	9.8	39.0	140	10350210